

# Wall System

Tranquility that embraces.



**deblick**



# The peace to hear yourself think

Walls enclose or divide the professional area. But what if they would also deliver privacy and make you feel protected? Made to measure for maximal impact and visual unity – any visual desired. Filled with all natural sheep wool that absorbs distracting work and discussion sounds our Wall Systems bring the place at ease. Let yourself be embraced by tranquility and enjoy the peace to hear yourself think.




# In standard sizes or made to measure



## Wall System - 43 mm and 26 mm thickness

2800 mm

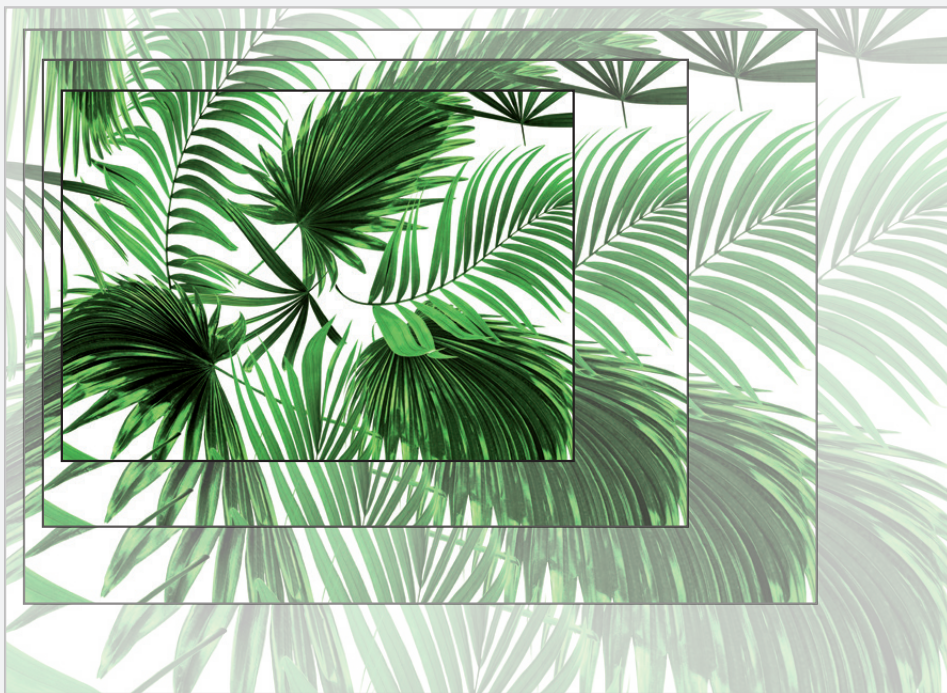

800 mm

3600 mm



Other sizes upon request.

[deblock.com](https://deblock.com)



**'IK WAS NIET GEFOCUST  
OM DE BESTE TE ZIJN,  
MAAR OM ELKE DAG  
BETER TE WORDEN.'**

**Esther Vergeer**

- 7 gouden medailles Paralympische Spelen (2000 Sydney, 2004 Athene, 2008 Beijing, 2012 Londen)
- 21 Grand Slam titels in het enkelspel
- 12 World Team Cup titels
- 470 wedstrijden op rij ongeslagen;
- Nummer 1 ranking van 1999 t/m januari 2013









# The divine details



### Frame

43mm or 26mm thick, recycled aluminium profile in accordance with EN-486. Standard colours RAL9010, 9016, 9005 – please contact us for special requests.  
Options to incorporate wall sockets, thermostats, etc.

### Filling


43mm frame: 40mm sheep's wool 4000 gr/m<sup>2</sup>.  
26mm frame: 23mm sheep's wool 2500 gr/m<sup>2</sup>.  
applied single-sides. Other fillings upon request.

### Upholstery


A list of fabric colours is included in the Material List – please contact us for special requests. Createx printed upholstery (picture, corporate identity): DIN EN 13501-1.

### Sound absorption

**43 mm:**  $\alpha_w$  1,00 (NEN-EN-ISO 354)

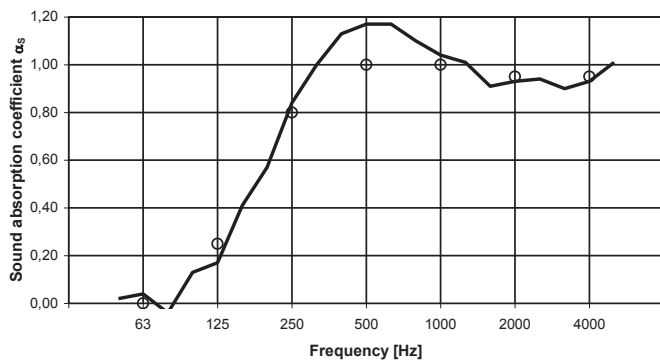

**26 mm:**  $\alpha_w$  0,75 (NEN-EN-ISO 354)

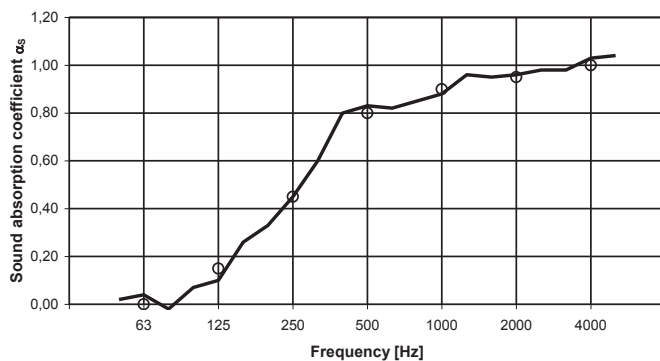

### Fire retardancy

Wool is naturally fire retardant. For the combustion of wool, 25,2% oxygen is needed. The air we breathe contains only 21% oxygen on average, which makes the material flame extinguishing. The flash point of wool can only be achieved at a temperature of circa 580°C.

Deblick is a certified company.



ecovadis

deblick.com

